



DATASHEET

Issue 1.0



Multifunction Meters

Transducers & Isolators

Temperature Controllers

Converters & Recorders

Digital Panel Meters

Current Transformers

Analogue Panel Meters

Shunts

Digital Multimeters

Clamp Meters

Insulation Testers

ND30BAC

METER OF POWER NETWORK PARAMETERS WITH BACnet

Features

- Measurement of 54 power network parameters, including current and voltage harmonics up to 51st, in 1-phase 2-wire or 3-phase 3 or 4-wire balanced and unbalanced systems
- Graphical colour display: LCD TFT 3,5", 320 x 240 pixels, fully configurable by a user (10 views, 8 parameters in each view)
- Indications include the values of programmed ratios
- Memory of minimum and maximum values
- 2 configurable alarm outputs
- Digital output RS-485 - MODBUS protocol
- Modern and user-friendly BACnet/ IP interface
- Programming of parameters using free econ software
- Battery backup RTC
- Overall dimensions: 96 x 96 x 77 mm.

ND30BAC - METER OF POWER NETWORK PARAMETERS WITH BACnet

Example of Application



Measurement and Visualization of Power Network Parameters

- Phase voltages: U_1, U_2, U_3
- Phase-to-phase voltages: U_{12}, U_{23}, U_{31}
- Phase currents i_1, i_2, i_3
- Active phase powers: $P(W)_1, P(W)_2, P(W)_3$
- Reactive phase powers: $Q(\text{Var})_1, Q(\text{Var})_2, Q(\text{Var})_3$
- Apparent phase powers: $S(\text{VA})_1, S(\text{VA})_2, S(\text{VA})_3$
- Active power factors: PF_1, PF_2, PF_3
- Three phase total power factor: total 3pf_t
- Reactive/active power factors: $\text{tg}\varphi_1, \text{tg}\varphi_2, \text{tg}\varphi_3$
- Active, reactive and apparent 3-phase power: $P(W), Q(\text{Var}), S(\text{VA})$
- Mean 3-phase power factors: PF, $\text{tg}\varphi$
- Frequency f
- Mean 3-phase voltage: U_S
- Mean phase-to-phase voltage: U_{MF}
- Mean 3-phase current: i_S
- 15, 30, 60 minutes mean active/reactive/apparent power: $P(W)_{\text{demand}}, Q(\text{Var})_{\text{demand}}, S(\text{VA})_{\text{demand}}$ and mean current i_{demand}
- Mean apparent power $S(\text{VA})_{\text{demand}}$
- Average current i_{demand}
- Active, reactive and apparent 3-phase energy: EnP (Wh) Import & Export, EnQ (Varh) inductive or capacitive, EnS (VAh),
- Active, reactive and apparent energy from external counter: EnPE
- Total harmonic content coefficients for phase voltages and currents $\text{THD}_{U1}, \text{THD}_{U2}, \text{THD}_{U3}, \text{THD}_{i1}, \text{THD}_{i2}, \text{THD}_{i3}$ and for 3-phase voltages and currents $\text{THD}_U, \text{THD}_i$
- Harmonics for current and phase voltage up to 51 st!
- kVAR demand
- Memory of minimum and maximum (Peak) values, Voltage (U), Current (I), Active Power (W), Reactive Power (Var), Apparent Power (VA), Power Factor (PF), Frequency (Hz), Demands, Temperature, THD

Features



Inputs



Outputs



Galvanic Isolation



ND30BAC - METER OF POWER NETWORK PARAMETERS WITH BACnet

TECHNICAL DATA

MEASURING RANGE						ACCURACY
Measured value	Measuring range	L1	L2	L3	Z	Class (%) / Basic error (%) class relative to the measured value acc. to EN61557-12
Current I/S A 1 A... 5 A...	0.010...0.100...1.200 A (tr, U=1) 0.050...0.500...6.000 A (tr, U=1) ...20.00 A (tr, U=1)	-	-	-	-	Class 0.2
Voltage U-W 37.7 V... 230 V... 400 V...	5.7...11.5...25.0 V (tr, U=1) 21.0...46...275.0 V (tr, U=1) 40.0...80...480.0 V (tr, U=1) ...480.0 kV (tr, U=1)	-	-	-	-	Class 0.2
Voltage U-L 100 V... 400 V... 690 V...	10.0...20...120.0 V (tr, U=1) 40.0...80...480.0 V (tr, U=1) 69.0...138...810.0 V (tr, U=1) ...810.0 kV (tr, U=1)	-	-	-	-	Class 0.5
Active power P _a , average active power P _{av}	... (-)1999.9 W ... (-)1999.9 MW (tr, U=1, tr, U=1)	-	-	-	-	Class 0.5
Reactive power Q	... (-)1999.9 Var ... (-)1999.9 MVar (tr, U=1, tr, U=1)	-	-	-	-	Class 1
Apparent power S _a , average apparent power S _{av}	...1999.9 VA ...1999.9 MVA (tr, U=1, tr, U=1)	-	-	-	-	Class 0.5
Active energy EnP (imported or exported)	... (-)1999.9 Wh ... (-)1999.9 MWh (tr, U=1, tr, U=1)	-	-	-	-	Class 0.5
Reactive energy EnQ (inductive or capacitive)	... (-)1999.9 Varh ... (-)1999.9 MVarh (tr, U=1, tr, U=1)	-	-	-	-	Class 1
Apparent energy EnS	...1999.9 VAh ...1999.9 MVAh (tr, U=1, tr, U=1)	-	-	-	-	Class 0.5
Active power factor PF _a	-1.00...0...1.00	-	-	-	-	± 0.01 of basic error
Coefficient tanφ (ratio of reactive power to active power)	-1.20...0...1.20	-	-	-	-	± 0.01 of basic error
Frequency f	45.00...65.00 Hz	-	-	-	-	Class 0.1
Total harmonic distortion of voltage THDU and current THDI	0.0...100.0 %	-	-	-	-	Class 5 50 / 60 Hz
Amplitudes of the voltage U _{u1} ...U _{un1} and current I _{u1} ...I _{un1}	0.0...100.0 %	-	-	-	-	Class 5 50 / 60 Hz

tr, U, tr, U – ratio of current and voltage transformer

DIGITAL INTERFACE

Interface type	Transmission protocol		Remarks
RS-485	Modbus RTU (B2, SE 1, 80-1, 0W1)	Address 1...247	baud rate: 4.8, 9.6, 19.2 kbit/s, 57.6, 115.2 kbit/s
BACnet	BACnet/IP		

ND30BAC - METER OF POWER NETWORK PARAMETERS WITH BACnet

EXTERNAL FEATURES

Readout field	graphic color display LCD TFT 3,5" - 320 x 240 pixels	
Overall dimensions	96 x 96 x 77 mm	mounting hole 92,5 x 92,5 mm
Weight	0,3 kg	
Protection grade	from frontal side: IP65	from terminal side: IP20


RATED OPERATING CONDITIONS

Supply voltage	→ 85...253 V a.c. (40...50...400 Hz), 90...300 V d.c. or 20...40 V a.c., 20...60 V d.c.	power consumption ≤ 6 W
Power consumption	in voltage circuit ≤ 0,2 VA	in current circuit ≤ 0,1 VA
Input signal	0...8, 1...2 In, 0,1...0,2...1,2 Un for current, voltage, PF, typ.	frequency 45...50...60...65 Hz, sinusoidal (THD ≤ 8%)
Power factor	0...1	
Preheating time	5 min.	
Ambient temperature	-10...23...55°C, class K55 acc. to EN61557-12	
Humidity	0...85...95%	without condensation
Operating position	any	
External magnetic field	≤ 60...400 A/m a.c.	≤ 3 A/m a.c. 50/60 Hz
Short-term overload	voltage input: 2 In (5 sec.)	current input 50 A (1 sec.)
Admissible crest factor	current: 2	voltage: 2
Additional error (in % of the intrinsic error)		from ambient temperature change: < 0,3% / 10°C


SAFETY AND COMPATIBILITY REQUIREMENTS

Electromagnetic compatibility	noise immunity	acc. to EN 61000-6-2
	noise emissions	acc. to EN 61000-6-4
Isolation insured by the casing	double	acc. to EN 61010-1
Isolation between circuits	basic	acc. to EN 61010-1
Isolation level	2	acc. to EN 61010-1
Installation category	III	acc. to EN 61010-1
Maximal phase-to-earth voltage	<ul style="list-style-type: none"> for supply circuit and relay outputs: 300 V for measuring input: 500 V for circuits of RS-485, Ethernet, pulse input and output, analog outputs: 50 V 	acc. to EN 61010-1
Altitude a.s.l.	< 2000 m	

CONNECTION DIAGRAMS

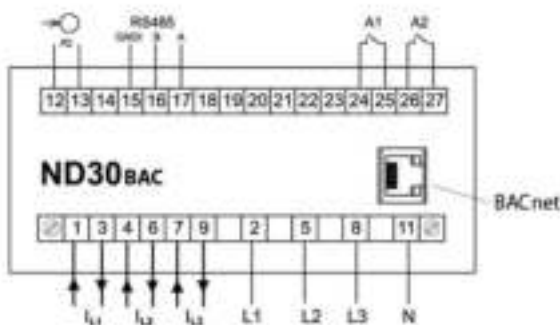

Description of meter connections strips

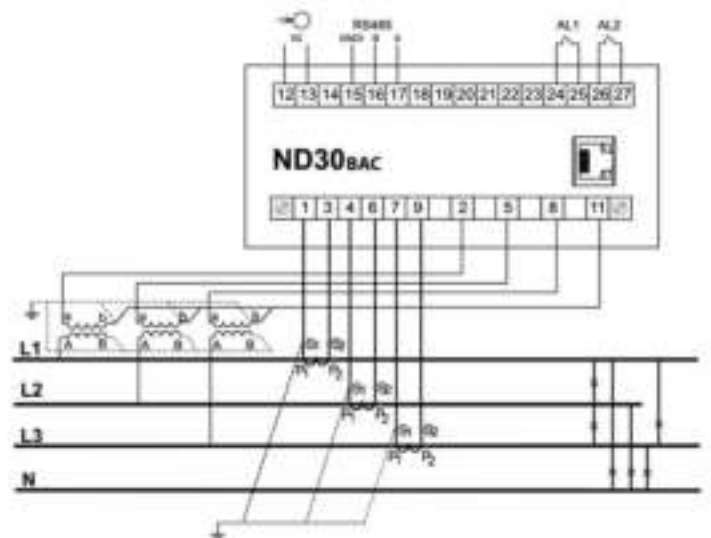

Indirect measurement in 4-wire network - connection of input signals

ND30BAC - METER OF POWER NETWORK PARAMETERS WITH BACnet

DISPLAING OF MEASUREMENT PARAMETERS



up to 10 programmable screens (8 parameters per page);
ability to change color for all screens



Available colors for digital indications:



two screens dedicated to harmonics;
indication of individual harmonic for voltages and currents (up to 51st);
bargraph presentation for all harmonics with zoom function



easy to use and intuitive menu;
information bar with status of: phase sequence, alarm outputs and interfaces, time and date

ND30BAC - METER OF POWER NETWORK PARAMETERS WITH BACnet

METER CONFIGURATION WITH FREE eCON SOFTWARE



ability to configure and update ND30BAC with free eCon software (via RS-485)

ORDERING CODE

Meter ND30BAC -	X	X	X	X	XX	X	X
Input voltage (phase/phase-to-phase) Un:							
3 x 57.7/ 100 V, 3 x 230/ 400 V	1						
3 x 110/ 190 V, 3 x 400/ 690 V	2						
Additional outputs /inputs:							
2 relays		1					
Interface:							
BACnet/IP and RS485(Modbus RTU)			2				
Supply:							
85...253 V a.c., 90...300 V d.c.				1			
20...40 V a.c., 20...60 V d.c.				2			
Version:							
standard					00		
custom-made*					XX		
Language:							
Polish						P	
English						E	
other*						X	
Acceptance tests:							
without additional quality requirements							0
with an extra quality inspection certificate							1
acc.to customer's request*							X

* only after agreeing with the manufacturer

Order example:

The code **ND30BAC - 112100E0** means:

ND30BAC - meter ND30BAC

1 - input voltage 3 x 57.7/ 100 V, 3 x 230/ 400 V

1 - 2 relays

2 - BACnet/IP and RS485(Modbus RTU)

1 - supply: 85...253 V a.c., 90...300 V d.c.

00 - standard version

E - user's manual in English

0 - without additional quality requirements.

ND30BAC - METER OF POWER NETWORK PARAMETERS WITH BACnet

SEE ALSO:



ND40 - power network analyzer/recorder



RE92 - dual loop controller



P30U - universal transducer of temperature and standard signals



KS31 - digital synchronizing unit



N43 - rail mounted 3-phase power network meter



P43 - 3-phase transducer of power network parameters



ND1 - analyser of network parameters



Current transformers from 5 A up to 6 kA