




Technical Data Sheet

Contender Series meter

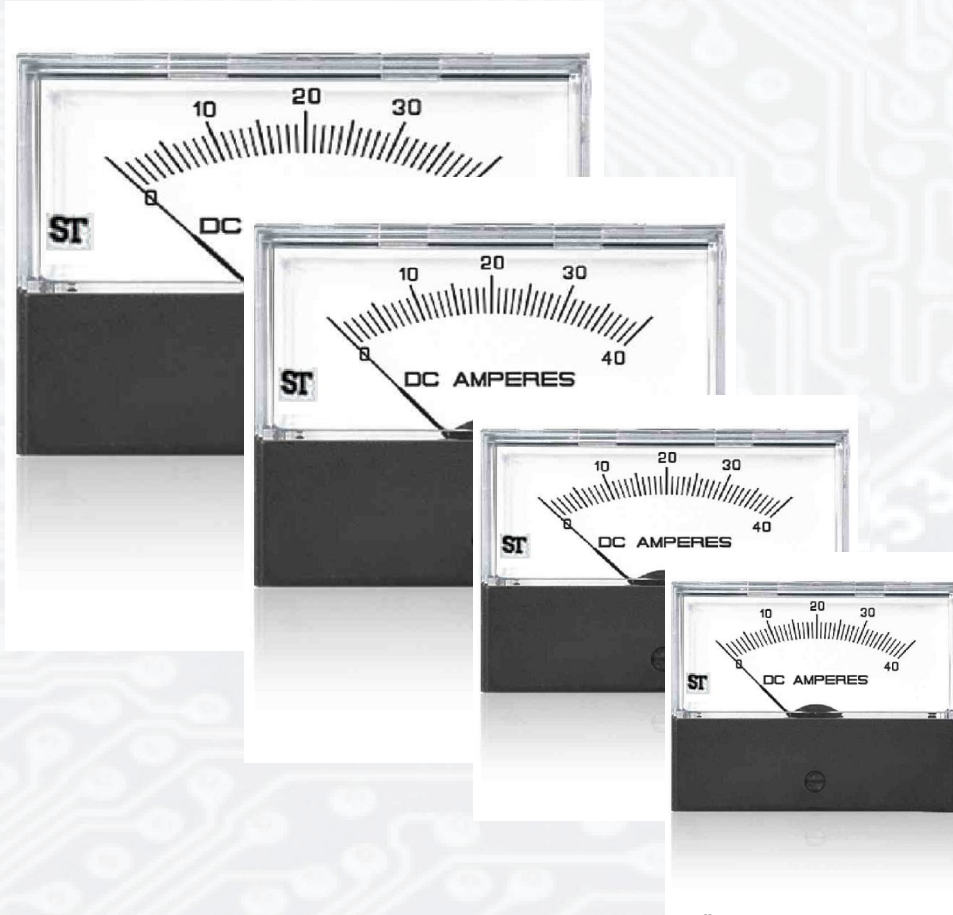

The moving iron & moving coil panel meters, sizes $1\frac{1}{2}$ ", $2\frac{1}{2}$ ", $3\frac{1}{2}$ ", $4\frac{1}{2}$ " are housed in a moulded polycarbonate cases which are suitable for the measurement of AC & DC ammeters, voltmeter & frequency meters utilizing a high torque pivot and jewel movement.

Special Features

- Surface or window mounting.
- Near linear scale.
- Glass filled polycarbonate housing (UL 94 V-0).
- Knife edge pointer.

Application

The contender range of analog panel meters offers accurate measurement and indication of most electrical & electronics parameters in industry standard 1^{1/2}", 2^{1/2}", 3^{1/2}", 4^{1/2}" case sizes. This innovative design features a detachable lower fascia plate which allows the flexibility of either surface or window mounting. The fascia is simply unclipped to achieve the completely flush panel appearance of panel window mounting.

The range offers AC & DC ammeters, voltmeters and frequency meters utilizing a high torque pivot and jewel movement. AC moving coil rectified meters provide 1.5% accuracy of full scale value and features a rear zero adjuster screw for tamper proof installation. AC moving iron meters also provide 1.5% high accuracy and true RMS measurement.

Functional Areas

- Marine
- Switchgear
- Distribution systems
- Control panels
- Embedded generation
- Energy management
- Building management
- Utility power management
- Process control
- Motor monitoring

Features

- Measuring and indication of AC amps, volts, frequency and DC signals.
- Surface or window mounting.
- Rear zero adjuster on moving coil meters.
- High torque pivot and jewel movement.
- True RMS measurement meters.
- *AC and DC inputs.
- Up to 40A DC direct connected.
- Up to 50A AC direct connected.

(Not applicable for model 112)*

Benefits

- AC moving iron and moving coil mechanisms.
- ANSI standard case sizes.
- Detachable lower fascia plate.
- Easy to modify for distributions.

Operation

Moving Coil Meter

These meters offers a centre cored, self shielding moving coil movements using pivots, hairspring and spring jewels. Variations in movement are limited by design. All DC voltmeters are 1000 ohms per volt, moving coil rectified products run at 900 ohms per volt. Milivolt meter use the 5 miliamps/50mV resistance.

Moving Iron Meter

This clapper type repulsion design utilizes a pivot, hairspring and jewel movement. The bottom jewel is oil filled to provide damping while the top is spring for resilience. All voltmeters are manufactured with internal voltage dropper resistor.

Frequency Meter

Frequency meters use a 1 mA/350ohm movement driven by an EMC hard frequency conversion circuit.

Dials, Pointers and Scales

Standard dials are matt white black printed scales and a tubular knife-edge black are balanced within 1% of scale length and feature a highly repeatable flattened arc scale shape, ensuring consistently accurate measurement reading. Dials are interchangeable between the contender range of products using the same input within the published specification of the meter. Options for non standard customer specific dials are available upon request.

Technical Specifications

Applicable Standards	
Terminal bolts/leads	DIN 46200/46282
Safety requirements and protective measures for Electrical indicating instruments and their accessories	IEC 529, IEC 61010-1
Performance specifications for direct acting indicating analogue electrical measuring instruments and their accessories	IS 1248 IEC 51 ANSI C39.1 1981
UL Compatibility	UL 94 V-0

Comply with following European directives

2004 / 108 / EC (EMC directive), 2006 / 95/EC (low voltage directive) & amendment 93/68/EEC, For CE Marking.

Scale and Pointer				
Pointer	Tube knife - edge pointer			
Pointer deflection	90°			
Scale characteristics	(A) Near Linear above 10% of nominal full Scale value for moving iron (B) Linear scale for moving coil , frequency, moving coil with rectifier			
Scale division	Coarse - fine			
Scale length	112	212	312	412
	32.56 mm	49.03 mm	57.22mm	90.14 mm

Nominal Range of use

Ambient Temperature	0 ...40 °C
Position of use	Vertical ± 5°
Frequency	FN ± 10%
External Magnetic Field	At 0.4 kA/m

Mechanical Data

Case details	Moulded case suitable for mounting in Control / switchgear panels Machinery consoles.
Case material	Polycarbonate , flame retardant and drip proof as per UL 94 V-0.
Front window	Polycarbonate (Shatter proof & transparent)
Colour of front cover	Black
Position of use	Vertical
Panel fixing	Fixing Stud
Panel thickness	≤ 10 mm

Terminals

Voltmeters and Ammeters & Frequency meters	Terminal 10-32 UNF, Washer 10-32 UNF
Fixing	Surface mounting: 4 corner studs, 4-40 UNC
	Rear of panel mounting: 2 through hole mounts (Except Model 112)

Reference Conditions

Accuracy	According to IEC 51/DIN EN 60051
DC Ammeters & Voltmeters	1.5% 0 to 100% of full scale deflection
AC Ammeters & Voltmeters	Moving iron: 1.5% 10 to 100% of full scale deflection Moving coil: 1.5% 0 to 100% of full scale deflection
Frequency Meters	0.5% of end scale value
Ambient temperature	23 C ± 2°C
Position of use	Nominal position ±1°
Input Waveform	Rated value of measured quantity sine wave, distortion factor ≤ 5%
Frequency	45 - 65Hz
Other Conditions	IEC 51/DIN EN 60051

Electrical Data

DC moving coil Ammeters	50 mA to 40 A
DC moving coil Voltmeters	50 mV to 600 V
AC moving coil Ammeters (VQ)	1 mA to 100 mA
AC moving coil Voltmeters (VQ)	6 V to 600 V
AC moving iron Ammeters (EQ)	100 mA to 50 A
AC moving coil Voltmeters (EQ)	6 V to 600 V
Frequency Meters	45-50-55Hz, 55-60-65Hz, 45-55-65Hz, 360-440Hz
Overload	Continuous 1.2

Environmental Conditions

Climatic Suitability	Climate category II as per IEC 60051 (climatic class 3 according to VDE/VDI 3540)
Operating Temperature	0°C... + 40°C
Storage temperature	- 20°C ...+55°C
Relative humidity	25% to 80% nominal range of use
Shock resistance	15 g. for pulse duration 11ms
Vibration resistance	ANSI C39.1 cl. 5. 13

Options

Case	
Front Window	Shatter Proof Polycarbonate (Transparent)
Color of Front cover	Black
Dial	
Blank dial	With initial and end values marked
Special markings	Numbering/ Lettering
Division dials	Basic divisions without numbering
Color markings/bands	Red or green
Over rang (Moving Iron Ammeter)	Two, three and five times over range

Standard Measuring Ranges

DC moving coil Ammeters	50 mA to 40 A
DC moving coil Voltmeters	50 mV to 600 V
AC moving coil Ammeters (VQ)	1 mA to 100 mA
AC moving coil Voltmeters (VQ)	6 V to 600 V
*AC moving iron Ammeters (EQ)	100 mA to 50 A
*AC moving coil Voltmeters (EQ)	6 V to 600 V
Frequency Meters	45-50-55Hz, 55-60-65Hz, 45-55-65Hz, 360-440Hz

* 112 size not applicable

Accessories

Safety Precautions

- 1) Instruments with damaged window or glasses must be disconnected from the mains.
- 2) Adequate safety clearance must be maintained to control panel fasteners and to sheet metal housing. If non - insulated connector wires are used.
- 3) Instruments to be used in grounded panel.

Specifications

A.C. AMMETERS - PIVOT & JEWEL - MOVING IRON TYPE (EQ)

Rating	Scale	212	312
1A	0-1A	PK-260-240-LALA	PK-260-340-LALA
5A	0-5A	PK-260-240-LSLS	PK-260-340-LSLS
10A	0-10A	PK-260-240-MTMT	PK-260-340-MTMT
15A	0-15A	PK-260-240-NDND	PK-260-340-NDND
20A	0-20A	PK-260-240-NGNG	PK-260-340-NGNG
30A	0-30A	PK-260-240-NLNL	PK-260-340-NLNL
1A	Transformer Rated	PK-260-240-LAXX	PK-260-340-LAXX
5A	Transformer Rated	PK-260-240-LSXX	PK-260-340-LSXX

A.C. VOLTMETERS - PIVOT & JEWEL - MOVING IRON TYPE (EQ)

Rating	Scale	212	312
150V	0-150V	PK-260-244-PZPZ	PK-260-344-PZPZ
300V	0-300V	PK-260-244-RXRX	PK-260-344-RXRX
600V	0-600V	PK-260-244-SJSJ	PK-260-344-SJSJ
150V	Transformer Rated	PK-260-244-PZXX	PK-260-344-PZXX

D.C. AMMETERS - PIVOT & JEWEL - MOVING COIL TYPE (PQ)

Rating	Scale	212	312
0-1 mA	0-1 mA	PK-260-200-FAFA	PK-260-300-FAFA
0-5 mA	0-5 mA	PK-260-200-FXFX	PK-260-300-FXFX
0-10 mA	0-10 mA	PK-260-200-GZGZ	PK-260-300-GZGZ
0-20 mA	0-20 mA	PK-260-200-HFHF	PK-260-300-HFHF
0-50 mA	0-50 mA	PK-260-200-HYHY	PK-260-300-HYHY
0-100 mA	0-100 mA	PK-260-200-JRJR	PK-260-300-JRJR
0-200 mA	0-200 mA	PK-260-200-KAKA	PK-260-300-KAKA
0-500 mA	0-500 mA	PK-260-200-KMKM	PK-260-300-KMKM
4-20 mA	4-20 mA	PK-260-200-HEHE	PK-260-300-HEHE
0-1A	0-1A	PK-260-200-LALA	PK-260-300-LALA
0-1.5A	0-1.5A	PK-260-200-LCLC	PK-260-300-LCLC
0-3A	0-3A	PK-260-200-LJLJ	PK-260-300-LJLJ
0-5A	0-5A	PK-260-200-LSLS	PK-260-300-LSLS
0-10A	0-10A	PK-260-200-MTMT	PK-260-300-MTMT
0-15A	0-15A	PK-260-200-NDND	PK-260-300-NDND
0-20A	0-20A	PK-260-200-NGNG	PK-260-300-NGNG
0-30A	0-30A	PK-260-200-NLNL	PK-260-300-NLNL
0-50mV	Shunt Rated	PK-260-224-ECXX	PK-260-324-ECXX
0-100mV	Shunt Rated	PK-260-224-GBXX	PK-260-324-GBXX

D.C. VOLTMETERS - PIVOT & JEWEL - MOVING COIL TYPE (PQ)


Rating	Scale	212	312
0-15 V	0-15 V	PK-260-220-NDND	PK-260-320-NDND
0-50 V	0-50 V	PK-260-220-NTNT	PK-260-320-NTNT
0-75 V	0-75 V	PK-260-220-PBPB	PK-260-320-PBPB
0-150 V	0-150 V	PK-260-220-PZPZ	PK-260-320-PZPZ
0-400 V	0-400 V	PK-260-220-SCSC	PK-260-320-SCSC
0-600 V	0-600 V	PK-260-220-SJSJ	PK-260-320-SJSJ

FREQUENCY METERS, 120V - PIVOT & JEWEL (Self Contained)


Rating	Scale	212	312
55 Hz	45-65 Hz	PK-264-250-AJAJ	PK-264-350-AJAJ
60 Hz	55-65 Hz	PK-264-250-ANAN	PK-264-350-ANAN

Electrical Connections


DC Amps - Self Contained

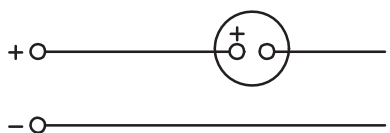


DC Amps - For use with external shunt

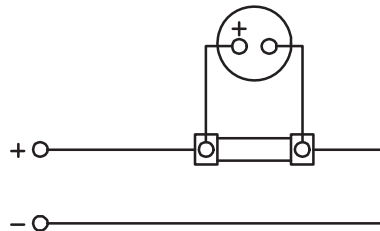


DC Volts

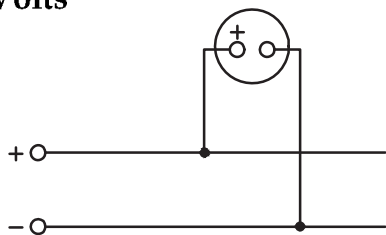


AC Amps - Self Contained

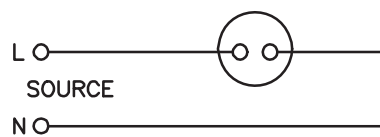


AC Amps - For use with Current Transformer

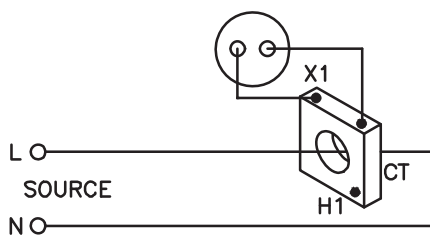

AC Volts

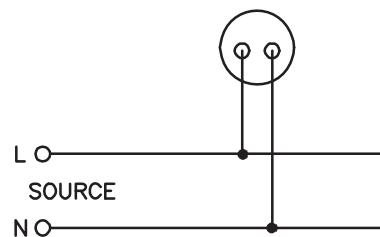


Frequency Meter

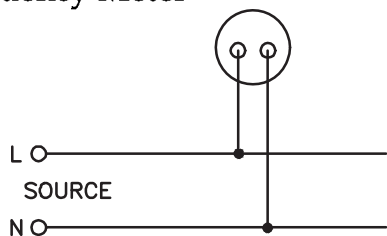

Dimensions


Surface Mount Cut Out



Surface Mount Cut Out




	A	B	C	D	E	F
112 (inch)	1.31	1.31	0.66	0.66	1.56	0.14
112 (mm)	33.27	33.27	16.76	16.76	39.62	3.56
212 (inch)	1.88	1.88	0.94	0.94	2.16	0.14
212 (mm)	47.75	47.75	23.88	23.88	54.86	3.56
312 (inch)	2.25	2.25	0.92	1.12	2.16	0.14
312 (mm)	57.15	57.15	23.37	28.45	54.85	3.56
412 (inch)	4	3.56	1.54	2	2.69	0.14
412 (mm)	101.6	90.42	39.12	50.8	68.33	3.56

Window Mounting Cut Out

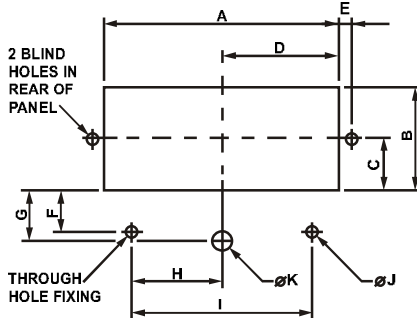

Window Mounting Cut Out

	A	B	C	D	E	F	G	H	I	J	K
112 (inch)	2.17	0.94	0.47	1.08	0.16	-	0.47	-	-	-	0.23
112 (mm)	55.12	23.88	11.94	27.43	4.06	-	11.94	-	-	-	5.84
212 (inch)	2.92	1.28	0.63	1.46	0.16	0.64	0.81	1.13	2.26	0.14	0.23
212 (mm)	74.17	32.51	16.0	37.08	4.06	16.26	20.57	28.70	57.40	3.56	5.84
312 (inch)	3.63	1.61	0.8	1.82	0.16	0.67	0.8	1.48	2.96	0.14	0.23
312 (mm)	92.20	40.89	20.32	46.23	4.06	17.20	20.35	37.59	75.18	3.56	5.84
412 (inch)	5.05	2.36	1.18	2.52	0.19	0.85	1.07	2.11	4.22	0.14	0.23
412 (mm)	128.27	59.94	29.97	64.01	4.83	21.59	21.9	53.59	107.19	3.56	5.84

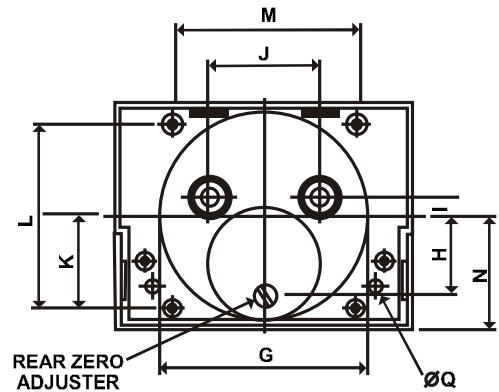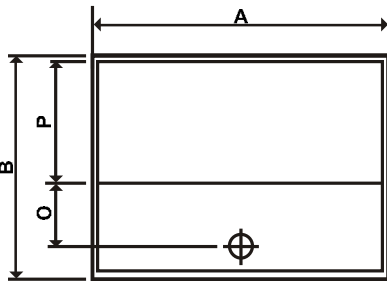

Model

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q
112 (inch)	2.26	1.75	1.3	0.5	-	0.13	1.50	0.57	0.15	0.95	0.65	1.30	1.30	0.85	0.53	0.9	0.14
112 (mm)	57.4	44.45	33.0	12.7	-	3.55	38.1	14.48	3.81	24.13	16.60	33.02	33.02	21.60	13.46	22.86	3.56
212 (inch)	3.0	2.30	1.3	0.5	1.46	0.15	2.12	0.81	0.2	1.12	0.94	1.88	1.88	1.16	0.63	1.27	0.156
212 (mm)	76.2	73.9	33.0	12.7	37.08	3.81	53.8	20.57	5.08	28.4	23.88	47.75	47.75	29.46	16	32.26	4
312 (inch)	3.75	2.91	1.3	0.5	1.46	0.16	2.12	0.81	0.2	1.12	0.92	2.25	2.25	1.25	0.81	1.42	0.23
312 (mm)	95.25	73.91	33.0	12.7	37.08	4.06	53.8	20.57	5.08	28.45	23.37	57.15	57.15	31.75	20.57	36.07	5.84
412 (inch)	5.10	4	1.3	0.5	1.46	0.51	2.65	1.02	-	1.12	1.53	3.55	4	2	0.96	2.30	0.23
412 (mm)	129.54	101.6	33.0	12.7	37.08	12.95	67.31	25.91	-	28.45	38.86	90.17	101.6	45.5	21.9	58.42	5.84

Smartlook/Contender/Anush Series Coding

PK - 250 2 40 LS LS

Digits 1, 2, and 3 Style ←

250/254 – Smartlook Amps/Volts (AC/DC)
 251/255 - Anush Amps/Volts (AC/DC)
 260/264 - Surface Mount Contender
 Amps/ Volts (AC/DC)
 261/265 - Window Mount Contender
 Amps/Volts (AC/DC)

Digit 4 ←

Size

- 1 - 1 1/2"
- 2 - 2 1/2"
- 3 - 3 1/2"
- 4 - 4 1/2"

Digits 5 and 6 →

Elec. And Mechanical Variables

- 00 - DC Amps Zero-Left
- 01 - DC Amps Zero-Center
- 04 DC Volts/Ext. Res. Zero-Left
- 05 -DC Volts/Ext. Res. Zero-Center
- 10 -AC Amps Rectified
- 20 -DC Volts Zero-Left
- 21 -DC Volts Zero-Center
- 24 -DC Millivolts Zero-Left
- 25 -DC Millivolts Zero-Center
- 30 -AC Volts Rectified
- 37 - AC Expanded Scale Voltmeter
- 38 -DC Expanded Scale Voltmeter
- 40 -AC Amps (I/V)* 60 Hz
- 44 -AC Volts (I/V)* 60 Hz
- 45 -AC Volts 400 Hz (I/V)* 50 - Frequency

Digits 9 and 10 ↓

Scale

- LS = 0-5 Amps
- MT = 0-10 Amps
- NG = 0-20 Amps

more codes available in lookup table below

**Digits 7 and 8
 Elec. Rating**

- LA = 1 Amps
- LC = 1.5Amps
- LJ = 3 Amps
- LS = 5 Amps
- MJ = 8 Amps

more codes available in lookup table below

Note: Smartlook available in 2.5" and 3.5"; Anush available in 1.5" and 2.5" and Contender available in all four sizes (1.5", 2.5", 3.5" and 4.5")

Lookup Table for Codes (Digits 7 and 8 and Digits 9 and 10)

Code	Range	Code	Range	Code	Range	Code	Range	Code	Range	Code	Range
CF	0-20 μ	CY	0-50 μ								
DR	0-100 μ										
EA	0-200 μ	EM	0-500 μ	EW	0-800 μ						
FA	0-1 m	FD	0-1.5 m	FG	0-2 m	FN	0-3 m	FX	0-5 m		
GZ	0-10 m										
HC	0-15 m	HF	0-20 m	HJ	0-25 m	HM	0-30 m	HY	0-50 m		
JJ	0-80 m	JR	0-100 m	JX	0-150 m						
KA	0-200 m	KD	0-250 m	KG	0-300 m	KM	0-500 m	KU	0-750 m	KW	0-800 m
LA	0-1	LC	0-1.5	LJ	0-3	LS	0-5				
MJ	0-8	MT	0-10								
ND	0-15	NG	0-20	NL	0-30	NP	0-40	NT	0-50	NW	0-60
PB	0-75	PD	0-80	PK	0-100	PZ	0-150				
RL	0-200	RS	0-250	RX	0-300						
SC	0-400	SF	0-500	SJ	0-600	SM	0-750	SN	0-800	SS	0-1000
TC	0-1500	TM	0-2000								
VA	0-1 kilo	VB	0-1.2 kilo	VC	0-1.5 kilo	VE	0-2 kilo	VJ	0-3 kilo		

For more details and product codes, please contact our local office

Sifam Tinsley Instrumentation Inc.

Address: 2105 Barrett Park Dr, Unit 105, Kennesaw, GA 30144

Tel.: 800-879-6171 | **E-mail:** info@sifamtinsley.com | **Web:** www.sifamtinsley.com