



## CST SERIES - CAM SWITCHES

- Complete range of cam switches for control, instrumentation and motor starting applications.
- Available for currents from 6 A to 200 A.
- Quick and easy installation.
- Compact size with many switching programs.
- Multi pole design.
- Long distance visibility.
- Touch-proof terminals with IP20 protection.

TYPES:

**CST1** - CHANGEOVER


**CST2** - MULTI-STEP

**CST3** - ISOLATOR


**CST4** - SELECTOR

### APPLICATION EXAMPLES

Switching on the (emergency) power supply.

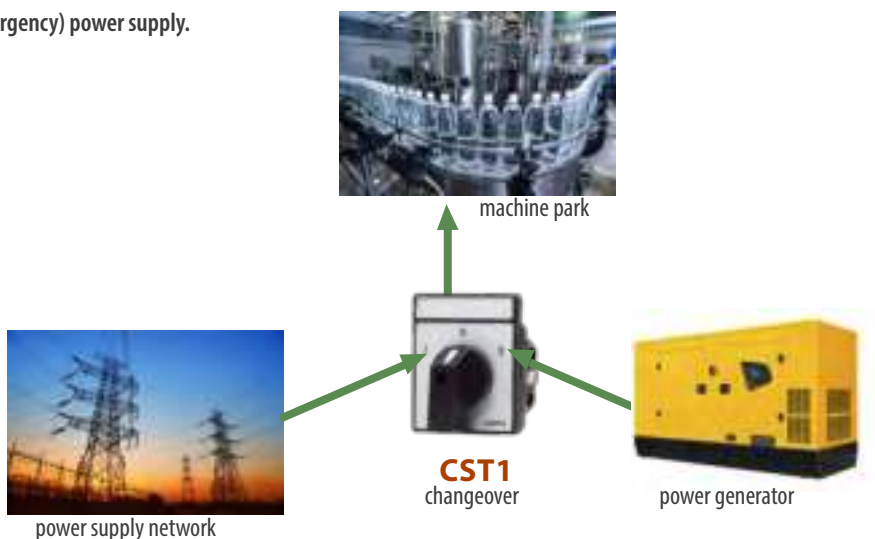


Measurement of phase and phase-to-phase voltage using only one voltmeter.

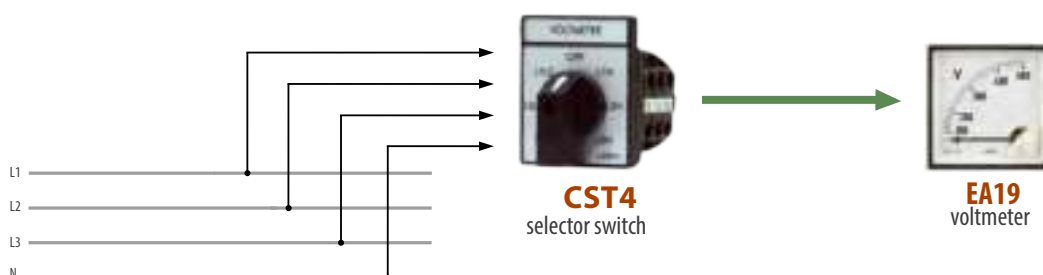

# CST1/CST2/CST3/CST4


## - CAM SWITCHES

### EXTERNAL DIMENSIONS

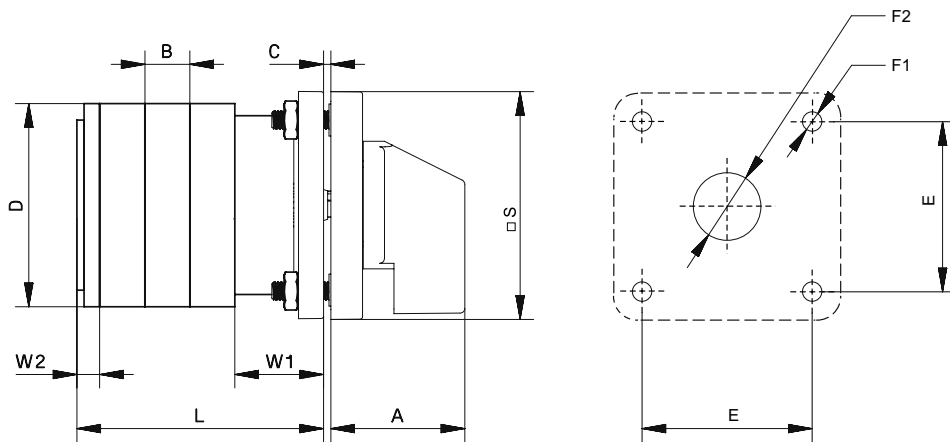


$$L = \text{No. of Stages of Prog} \times B + W1 + W2$$

Drilling plane

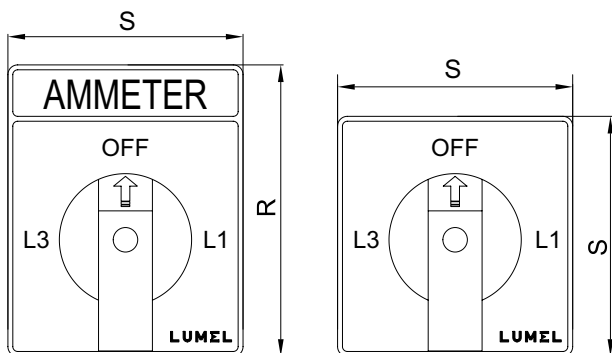

Type	A	B	C <sub>(max)</sub>	D	E	F1	F2	R	S	W1	W2
6 A	29 mm	9.7 mm	4 mm	32 mm	36 mm	4 mm	8 mm	48 mm	48 mm	13 mm	7 mm
10 A	29 mm	9.5 mm	4 mm	43 mm	36 mm	4 mm	7 mm	60 mm	48 mm	19 mm	5 mm
16 A	29 mm	9.5 mm	4 mm	43 mm	36 mm	4 mm	7 mm	60 mm	48 mm	19 mm	5 mm
20 A	29 mm	9.5 mm	4 mm	43 mm	36 mm	4 mm	7 mm	60 mm	48 mm	19 mm	5 mm
25 A	34 mm	14.3 mm	4 mm	53 mm	48 mm	4 mm	12 mm	64 mm	64 mm	24 mm	6.2 mm
32 A	34 mm	14.3 mm	4 mm	53 mm	48 mm	4 mm	12 mm	64 mm	64 mm	24 mm	6.2 mm
40 A	34 mm	14.3 mm	4 mm	53 mm	48 mm	4 mm	12 mm	64 mm	64 mm	24 mm	6.2 mm
63 A	34 mm	14.3 mm	4 mm	53 mm	48 mm	4 mm	12 mm	64 mm	64 mm	24 mm	6.2 mm
100 A	49 mm	29 mm	4 mm	88 mm	68 mm	5.5 mm	18 mm	88 mm	88 mm	27 mm	7 mm
200 A	49 mm	29 mm	4 mm	88 mm	68 mm	5.5 mm	18 mm	88 mm	88 mm	27 mm	7 mm

### INSTALLATION

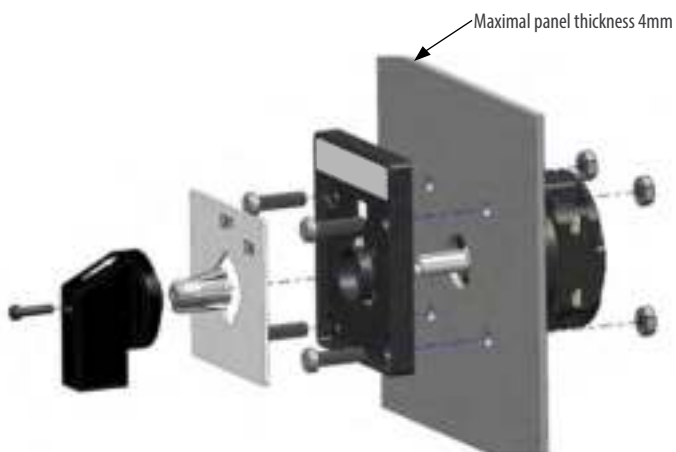

### AC DUTY RATINGS

Class	Application
AC-1	Non-Inductive or slightly inductive loads ( $\cos\phi \geq 0,95$ ); Resistance furnaces
AC-3	Squirrel-cage motors: starting switching off motors during running
AC-15	Control of AC electromagnetic loads
AC-21-A	Switching of resistive loads, including moderate overloads (frequent switching)
AC-23-A	Switching of motor loads or other highly inductive loads (frequent switching)

# CST1/CST2/CST3/CST4 - CAM SWITCHES

## TECHNICAL DATA

PARAMETERS		UNIT	6 A	10 A	16 A	20 A	25 A	32 A	40 A	63 A	100 A	200 A
Rated operational voltage (Ue)		V	440	440	690	690	690	690	690	690	690	690
Rated insulation voltage (Ui)		V	440	440	690	690	690	690	690	690	690	690
Rated uninteruptd current (Ith)		A	8	12	20	25	25	32	40	63	100	200
Rated short time withstand current (Icw)		A	72	120	192*	240*	300	384	480	756	1200	2400
Rated impulse withstand voltage (Uimp)		kV	4	4	4	4	6	6	6	6	6	6
Rated Fuse short circuit current		kA	3	3	5	5	10	10	10	10	15	25
Fuse size (Type gG/ gM)		A	6	10	16	20	25	32	50	63	100	200
The power of the receiver in terms of use												
AC23A 3 phase	220-240V	kW	1.1	1.8	3	3.7	4.7	5.5	7.5	11	22	22
	380-440V	kW	1.8	3	5.5	7.5	7.5	11	15	18.5	37	37
	500V	kW	-	-	5.5	7.5	11	15	18.5	22	45	45
	660-690V	kW	-	-	5.5	7.5	11	15	18.5	22	45	45
AC23A 1 phase	110V	kW	0.25	0.37	0.55	0.75	1.5	2.2	2.2	3	-	-
	220-240V	kW	0.5	0.75	1.5	2.2	3	3.7	5.5	7.5	-	-
	380-440V	kW	0.75	1.1	2.2	3.7	5.5	7.5	7.5	11	-	-
AC3 3 phase	220-240V	kW	1.1	1.5	3	3	4.7	5.5	7.5	11	22	22
	380-440V	kW	1.8	2.2	5.5	5.5	7.5	11	15	18.5	37	37
	500V	kW	-	-	5.5	5.5	11	15	18.5	22	45	45
	600-690V	kW	-	-	5.5	5.5	11	15	18.5	22	45	45
AC3 1 phase	110V	kW	0.25	0.3	0.55	0.6	1.5	2.2	2.2	3	-	-
	220-240V	kW	0.5	0.55	1.5	2.2	3	3.7	5.5	7.5	-	-
	380-440V	kW	0.75	0.75	2.5	3	5.5	7.5	7.5	11	-	-
AC21A/AC1		A	6	10	16	20	25	32	40	63	100	200
AC15	220-240V	A	2	2.5	5	5	8	14	16	16	20	-
	380-440V	A	1	1.5	4	4	5	6	7	7	10	-
Terminal cross-section												
Single / Multiple	Min	mm <sup>2</sup>	0.7	0.7	1.5	1.5	2.5	2.5	4	4	10	10
	Max	mm <sup>2</sup>	1.5	1.5	4	4	4	6	10	16	35	70
Fine strand with sleeve	Min	mm <sup>2</sup>	0.7	0.7	1	1	1.5	1.5	2.5	2.5	10	10
	Max	mm <sup>2</sup>	1.5	1.5	2.5	2.5	4	4	6	16	35	50
Terminal screw		metric	M3	M3	M3	M3	M4	M4	M4	M4	M10	M10
Terminal tightening torque		Nm	0.8	0.8	0.8	0.8	1.2	1.2	1.2	1.2	2.5	2.5

\* Rated short time withstand current (0.5s- current)

## RATED OPERATING CONDITIONS

Frequency	50/60 Hz	
Operating temperature	-25°C...60°C	
Storage temperature	-40°C...80°C	
Installation category	III	
Altitude a.s.l.	2000 m	
Protection grade	IP50 from frontal side	IP20 from terminal side
Standards	IEC 60947-1, IEC 60947-3, IEC 60947-5	

## SWITCH LIFE

Mechanical Life	100 000 operations at 300 cycles/hr	
Electrical Life	10 000 operations at 100% rated duty at 120 cycles/hr	
Contacts	double break	type AgNi
	double break	type AgCdO


# CST2 SERIES

## - MULTI-STEPS

### WIRING DIAGRAMS AND CODING

#### MULTI-STEPS CST2

Ordering code CST2-90T\_03OF\_\_00



Ordering code CST2-60L\_04OF\_\_00



Multi-step CST2		90T	03	O	F			00
<b>Rated current:</b>								
6 A		A						
10 A		B						
16 A		C						
25 A		D						
32 A		E						
40 A		F						
63 A		G						
100 A		H						
200 A		I						
<b>Pole:</b>								
1 pole			1					
2 poles			2					
3 poles			3					
4 poles			4					
<b>Front plate colour:</b>								
silver background and black knob							A	
yellow background and red knob							Y	
<b>Acceptance tests:</b>								
without additional quality requirements								0
with an extra quality inspection certificate								1

Multi-step CST2		60L	04	O	F			00
<b>Rated current:</b>								
6 A		A						
10 A		B						
16 A		C						
25 A		D						
32 A		E						
40 A		F						
63 A		G						
100 A		H						
200 A		I						
<b>Pole:</b>								
1 pole			1					
2 poles			2					
3 poles			3					
<b>Front plate colour:</b>								
silver background and black knob							A	
yellow background and red knob							Y	
<b>Acceptance tests:</b>								
without additional quality requirements								0
with an extra quality inspection certificate								1

Description	CST2								
	6A	10A	16A	25A	32A	40A	63A	100A	200A
	Stage number								
1-polar 3-way + OFF	2	2	2	2	2	2	2	2	2
2-polar 3-way + OFF	3	3	3	3	3	3	3	3	3
3-polar 3-way + OFF	5	5	5	5	5	5	5	5	5
4-polar 3-way + OFF	6	6	6	6	6	6	6	6	6

#### ITEMS AVAILABLE FROM OUR STOCK:


##### CST2-C60L1040FA000

- Multi-step 16A, angle 60°, rotation angle <360°, 1 pole, 4 ways, with OFF, rectangular knob, silver background, black knob

##### CST2-C60L1040FY000

- Multi-step 16A, angle 60°, rotation angle <360°, 1 pole, 4 ways, with OFF, rectangular knob, yellow background, red knob

Description	CST2								
	6A	10A	16A	25A	32A	40A	63A	100A	200A
	Stage number								
1-polar 4-way + OFF	2	2	2	2	2	2	2	2	2
2-polar 4-way + OFF	4	4	4	4	4	4	4	4	4
3-polar 4-way + OFF	6	6	6	6	6	6	6	6	6

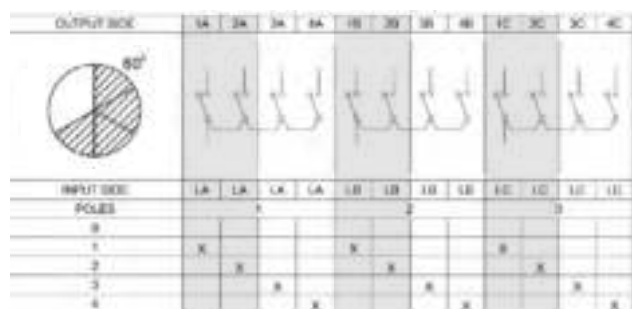

# CST2 SERIES

## - MULTI-STEPS

### WIRING DIAGRAMS AND CODING

#### MULTI-STEPS CST2

Ordering code CST2-60T\_05OF\_\_00




Multi-step CST2-		60T	05	O	F			00
<b>Rated current:</b>								
6 A								A
10 A								B
16 A								C
25 A								D
32 A								E
40 A								F
63 A								G
100 A								H
200 A								I
<b>Pole:</b>								
1 pole								1
2 poles								2
<b>Front plate colour:</b>								
silver background and black knob							A	
yellow background and red knob							Y	
<b>Acceptance tests:</b>								
without additional quality requirements							0	
with an extra quality inspection certificate							1	

Description	CST2							100A	200A
	6A	10A	16A	25A	32A	40A	63A		
	Stage number								
1-polar 5-way + OFF	3	3	3	3	3	3	3	3	
2-polar 5-way + OFF	5	5	5	5	5	5	5	5	

OUTPUT SIDE	1A	2A	3A	4A	5A	1B	2B	3B	4B	5B
INPUT SIDE	1A	1A	1A	1A	1A	1B	1B	1B	1B	1B
POLES	1					2				
0										
1	X					X				
2		X					X			
3			X					X		
4				X					X	
5					X					X

Ordering code CST2\_40L\_06OF\_\_00



Multi-step CST2-		40L	06	O	F			00
<b>Rated current:</b>								
6 A								A
10 A								B
16 A								C
25 A								D
32 A								E
40 A								F
63 A								G
<b>Pole:</b>								
1 pole								1
2 poles								2
<b>Front plate colour:</b>								
silver background and black knob							A	
yellow background and red knob							Y	
<b>Acceptance tests:</b>								
without additional quality requirements							0	
with an extra quality inspection certificate							1	

Description	CST2						
	6A	10A	16A	25A	32A	40A	63A
	Stage number						
1-polar 6-way + OFF	3	3	3	3	3	3	3
2-polar 6-way + OFF	6	6	6	6	6	6	6

OUTPUT SIDE	1A	2A	3A	4A	5A	6A	1B	2B	3B	4B	5B	6B
INPUT SIDE	1A	1A	1A	1A	1A	1A	1B	1B	1B	1B	1B	1B
POLES	1						2					
0												
1	X						X					
2		X						X				
3			X						X			
4				X						X		
5					X						X	
6						X						X

# CST2 SERIES

## - MULTI-STEPS

### WIRING DIAGRAMS AND CODING

#### MULTI-STEPS CST2

Ordering code **CST2-40T107OF**\_ \_00



Multi-step CST2-		40T107OF	-	-	00
<b>Rated current:</b>					
6 A	A				
10 A	B				
16 A	C				
25 A	D				
32 A	E				
40 A	F				
63 A	G				
<b>Front plate colour:</b>					
silver background and black knob		A			
yellow background and red knob		Y			
<b>Acceptance tests:</b>					
without additional quality requirements					0
with an extra quality inspection certificate					1

Description	CST2						
	6A	10A	16A	25A	32A	40A	63A
	Stage number						
1-polar 7-way + OFF	4	4	4	4	4	4	4

OUTPUT SIDE	1A	2A	3A	4A	5A	6A	7A
INPUT SIDE	1A	1A	1A	1A	1A	1A	1A
0							
1	X						
2		X					
3			X				
4				X			
5					X		
6						X	
7							X

Ordering code **CST2-30L108OF**\_ \_00



Multi-step CST2-		30L108OF	-	-	00
<b>Rated current:</b>					
6 A	A				
10 A	B				
16 A	C				
<b>Front plate colour:</b>					
silver background and black knob		A			
yellow background and red knob		Y			
<b>Acceptance tests:</b>					
without additional quality requirements					0
with an extra quality inspection certificate					1

Description	CST2		
	6A	10A	16A
	Stage number		
1-polar 8-way + OFF	4	4	4

OUTPUT SIDE	1A	2A	3A	4A	5A	6A	7A	8A
INPUT SIDE	1A	1A	1A	1A	1A	1A	1A	1A
0								
1	X							
2		X						
3			X					
4				X				
5					X			
6						X		
7							X	
8								X

# CST2 SERIES

## - MULTI-STEPS

### WIRING DIAGRAMS AND CODING

#### MULTI-STEPS CST2

Ordering code CST2-30T109OF\_00



Multi-step CST2-		30T109OF	-	-	00
<b>Rated current:</b>					
6 A	A				
10 A	B				
16 A	C				
<b>Front plate colour:</b>					
silver background and black knob		A			
yellow background and red knob		Y			
<b>Acceptance tests:</b>					
without additional quality requirements				0	
with an extra quality inspection certificate				1	

Description	CST2		
	6A	10A	16A
	Stage number		
1-polar 9-way + OFF	5	5	5

OUTPUT SIDE	1A	2A	3A	4A	5A	6A	7A	8A	9A
INPUT SIDE	1A	1A	1A	1A	1A	1A	1A	1A	1A
0									
1	X								
2		X							
3			X						
4				X					
5					X				
6						X			
7							X		
8								X	
9									X

Ordering code CST2-30T110OF\_00



Multi-step CST2-		30T110OF	-	-	00
<b>Rated current:</b>					
6 A	A				
10 A	B				
16 A	C				
<b>Front plate colour:</b>					
silver background and black knob		A			
yellow background and red knob		Y			
<b>Acceptance tests:</b>					
without additional quality requirements				0	
with an extra quality inspection certificate				1	

Description	CST2		
	6A	10A	16A
	Stage number		
1-polar 10-way + OFF	5	5	5

OUTPUT SIDE	1A	2A	3A	4A	5A	6A	7A	8A	9A	10A
INPUT SIDE	1A	1A	1A	1A	1A	1A	1A	1A	1A	1A
0										
1	X									
2		X								
3			X							
4				X						
5					X					
6						X				
7							X			
8								X		
9									X	
10										X

Ordering code CST2-30T111OF\_00



Multi-step CST2-		30T111OF	-	-	00
<b>Rated current:</b>					
6 A	A				
10 A	B				
16 A	C				
<b>Front plate colour:</b>					
silver background and black knob		A			
yellow background and red knob		Y			
<b>Acceptance tests:</b>					
without additional quality requirements				0	
with an extra quality inspection certificate				1	

Description	CST2		
	6A	10A	16A
	Stage number		
1-polar 11-way + OFF	6	6	6

OUTPUT SIDE	1A	2A	3A	4A	5A	6A	7A	8A	9A	10A	11A
INPUT SIDE	1A	1A	1A	1A	1A	1A	1A	1A	1A	1A	1A
0											
1	X										
2		X									
3			X								
4				X							
5					X						
6						X					
7							X				
8								X			
9									X		
10										X	
11											X

# CST2 SERIES

## - MULTI-STEPS

### WIRING DIAGRAMS AND CODING


#### MULTI-STEPS CST2

Ordering code CST2-60L\_03WF\_\_00



Multi-step CST2-		60L	-	03WF	-	-	00
<b>Rated current:</b>							
6 A	A						
10 A	B						
16 A	C						
25 A	D						
32 A	E						
40 A	F						
63 A	G						
100 A	H						
200 A	I						
<b>Pole:</b>							
1 pole	1						
2 poles	2						
3 poles	3						
4 poles	4						
<b>Front plate colour:</b>							
silver background and black knob							A
yellow background and red knob							Y
<b>Acceptance tests:</b>							
without additional quality requirements							0
with an extra quality inspection certificate							1

Description	6A	10A	16A	25A	32A	40A	63A	100A	200A
	Stage number								
1-polar 3-way without OFF	2	2	2	2	2	2	2	2	2
2-polar 3-way without OFF	3	3	3	3	3	3	3	3	3
3-polar 3-way without OFF	5	5	5	5	5	5	5	5	5
4-polar 3-way without OFF	6	6	6	6	6	6	6	6	6

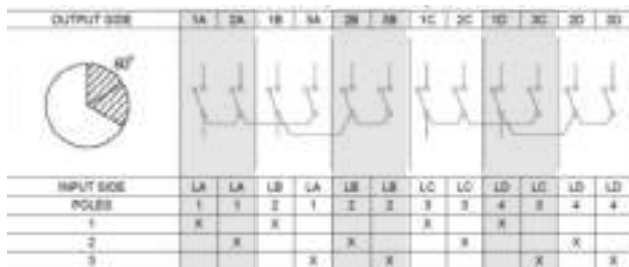

Ordering code CST2-90T\_04WF\_\_00



Multi-step CST2-		90T	-	04WF	-	-	00
<b>Rated current:</b>							
6 A	A						
10 A	B						
16 A	C						
25 A	D						
32 A	E						
40 A	F						
63 A	G						
100 A	H						
200 A	I						
<b>Pole:</b>							
1 pole	1						
2 poles	2						
3 poles	3						
<b>Front plate colour:</b>							
silver background and black knob							A
yellow background and red knob							Y
<b>Acceptance tests:</b>							
without additional quality requirements							0
with an extra quality inspection certificate							1

Description	6A	10A	16A	25A	32A	40A	63A	100A	200A
	Stage number								
1-polar 4-way without OFF	2	2	2	2	2	2	2	2	2
2-polar 4-way without OFF	4	4	4	4	4	4	4	4	4
3-polar 4-way without OFF	6	6	6	6	6	6	6	6	6





# CST2 SERIES

## - MULTI-STEPS

### WIRING DIAGRAMS AND CODING

#### MULTI-STEPS CST2

Ordering code CST2-60L\_05WF\_\_00



Multi-step CST2-		60L	05WF	00
<b>Rated current:</b>				
6 A	A			
10 A	B			
16 A	C			
25 A	D			
32 A	E			
40 A	F			
63 A	G			
100 A	H			
200 A	I			
<b>Pole:</b>				
1 pole		1		
2 poles		2		
<b>Front plate colour:</b>				
silver background and black knob				A
yellow background and red knob				Y
<b>Acceptance tests:</b>				
without additional quality requirements				0
with an extra quality inspection certificate				1


Ordering code CST2-60T\_06WF\_\_00



Multi-step CST2-		60t	06WF	00
<b>Rated current:</b>				
6 A	A			
10 A	B			
16 A	C			
25 A	D			
32 A	E			
40 A	F			
63 A	G			
100 A	H			
200 A	I			
<b>Pole:</b>				
1 pole		1		
2 poles		2		
<b>Front plate colour:</b>				
silver background and black knob				A
yellow background and red knob				Y
<b>Acceptance tests:</b>				
without additional quality requirements				0
with an extra quality inspection certificate				1

Description	Stage number								
	6A	10A	16A	25A	32A	40A	63A	100A	200A
	1-polar 5-way without OFF	3	3	3	3	3	3	3	3
2-polar 5-way without OFF	5	5	5	5	5	5	5	5	5

Description	Stage number								
	6A	10A	16A	25A	32A	40A	63A	100A	200A
	1-polar 6-way without OFF	3	3	3	3	3	3	3	3
2-polar 6-way without OFF	6	6	6	6	6	6	6	6	6

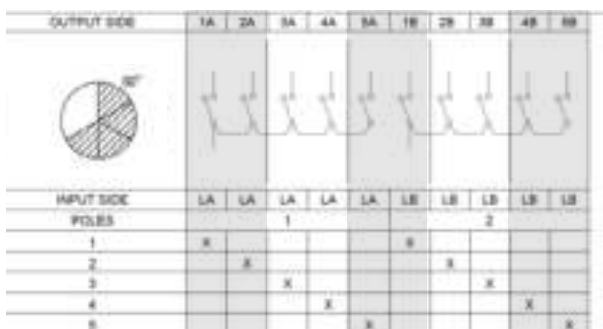


# CST2 SERIES

## - MULTI-STEPS

### WIRING DIAGRAMS AND CODING

#### MULTI-STEPS CST2

Ordering code CST2-40L107WF\_\_00



Multi-step CST2-		40L107WF	-	-	00
<b>Rated current:</b>					
6 A	A				
10 A	B				
16 A	C				
25 A	D				
32 A	E				
40 A	F				
63 A	G				
<b>Front plate colour:</b>					
silver background and black knob		A			
yellow background and red knob		Y			
<b>Acceptance tests:</b>					
without additional quality requirements		0			
with an extra quality inspection certificate		1			



Ordering code CST2-40T108WF\_\_00 P



Multi-step CST2-		40T108WF	-	-	00
<b>Rated current:</b>					
6 A	A				
10 A	B				
16 A	C				
25 A	D				
32 A	E				
40 A	F				
63 A	G				
<b>Front plate colour:</b>					
silver background and black knob		A			
yellow background and red knob		Y			
<b>Acceptance tests:</b>					
without additional quality requirements		0			
with an extra quality inspection certificate		1			

Description							
	6A	10A	16A	25A	32A	40A	63A
	Stage number						
1-polar 7-way without OFF	4	4	4	4	4	4	4

Description							
	6A	10A	16A	25A	32A	40A	63A
	Stage number						
1-polar 8-way without OFF	4	4	4	4	4	4	4

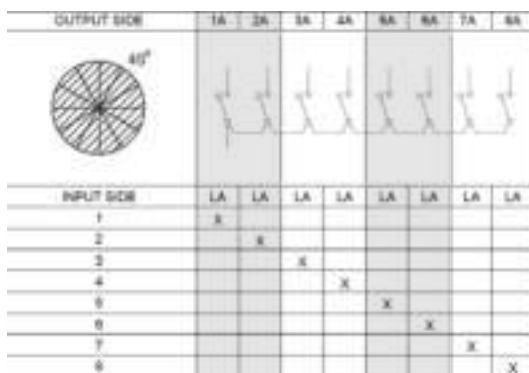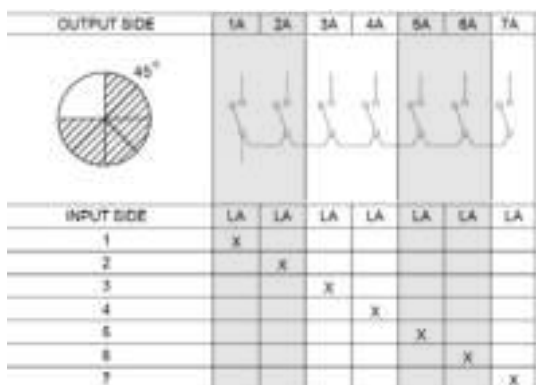

# CST2 SERIES

## - MULTI-STEPS

### WIRING DIAGRAMS AND CODING

#### MULTI-STEPS CST2

Ordering code CST2-30L109WF\_00



Multi-step CST2		30L109WF	-	-	00
<b>Rated current:</b>					
6 A	A				
10 A	B				
16 A	C				
<b>Front plate colour:</b>					
silver background and black knob		A			
yellow background and red knob		Y			
<b>Acceptance tests:</b>					
without additional quality requirements		0			
with an extra quality inspection certificate		1			

Description			
	6A	10A	16A
	Stage number		
1-polar 9-way without OFF	5	5	5

OUTPUT SIDE	1A	2A	3A	4A	5A	6A	7A	8A	9A
INPUT SIDE	1A	2A	3A	4A	5A	6A	7A	8A	9A
1	X								
2		X							
3			X						
4				X					
5					X				
6						X			
7							X		
8								X	
9									X

Ordering code CST2-30L110WF\_00



Multi-step CST2		30L110WF	-	-	00
<b>Rated current:</b>					
6 A	A				
10 A	B				
16 A	C				
<b>Front plate colour:</b>					
silver background and black knob		A			
yellow background and red knob		Y			
<b>Acceptance tests:</b>					
without additional quality requirements		0			
with an extra quality inspection certificate		1			

Description			
	6A	10A	16A
	Stage number		
1-polar 10-way without OFF	5	5	5

OUTPUT SIDE	1A	2A	3A	4A	5A	6A	7A	8A	9A	10A
INPUT SIDE	1A	2A	3A	4A	5A	6A	7A	8A	9A	10A
1	X									
2		X								
3			X							
4				X						
5					X					
6						X				
7							X			
8								X		
9									X	
10										X

Ordering code CST2-30L111WF\_00



Multi-step CST2		30L111WF	-	-	00
<b>Rated current:</b>					
6 A	A				
10 A	B				
16 A	C				
<b>Front plate colour:</b>					
silver background and black knob		A			
yellow background and red knob		Y			
<b>Acceptance tests:</b>					
without additional quality requirements		0			
with an extra quality inspection certificate		1			

Description			
	6A	10A	16A
	Stage number		
1-polar 11-way without OFF	6	6	6

OUTPUT SIDE	1A	2A	3A	4A	5A	6A	7A	8A	9A	10A	11A
INPUT SIDE	1A	2A	3A	4A	5A	6A	7A	8A	9A	10A	11A
1	X										
2		X									
3			X								
4				X							
5					X						
6						X					
7							X				
8								X			
9									X		
10										X	
11											X

# CST2 SERIES

## - MULTI-STEPS

### WIRING DIAGRAMS AND CODING

#### MULTI-STEPS CST2

Ordering code CST2-30T12WF\_00



Multi-step CST2-		30T12WF	-	-	00
<b>Rated current:</b>					
6 A	A				
10 A	B				
16 A	C				
<b>Front plate colour:</b>					
silver background and black knob		A			
yellow background and red knob		Y			
<b>Acceptance tests:</b>					
without additional quality requirements				0	
with an extra quality inspection certificate				1	

Description	Stage number		
	6A	10A	16A
1-polar 12-way without OFF	6	6	6

OUTPUT SIDE	1A	2A	3A	4A	5A	6A	7A	8A	9A	10A	11A	12A
1	X											
2		X										
3			X									
4				X								
5					X							
6						X						
7							X					
8								X				
9									X			
10										X		
11											X	
12												X

#### CODING OF CST2 SERIES

Multi-step CST2-		-	-	0	-	-	-	-	F	-	-	00
<b>Rated current:</b>												
6 A	A											
10 A	B											
16 A	C											
25 A	D											
32 A	E											
40 A	F											
63 A	G											
100 A	H											
200 A	I											
<b>Angle:</b>												
30°	3											
45°	4											
60°	6											
90°	9											
----- 0												
<b>Rotation angle:</b>												
360°									T			
less than 360°									L			
<b>Pole:</b>												
1 pole												1
2 poles												2
3 poles												3
4 poles												4
<b>No. of ways:</b>												
3 ways												03
4 ways												04
....												...
12 ways												12
<b>OFF way:</b>												
without OFF												W
with OFF												O
----- F												
<b>Front plate colour:</b>												
silver background and black knob		A										
yellow background and red knob		Y										
<b>Acceptance tests:</b>												
without additional quality requirements				0								
with an extra quality inspection certificate				1								
<b>Version:</b>												
standard												00
custom-made*												XX

\* - only after agreeing with the manufacturer

# CST1/CST2/CST3/CST4 SERIES

## - CAM SWITCHES

### ACCESSORIES - ORDERING

Ordering code	Description	View	Cam switch type
20-042-06-00007	CAM SWITCH KNOB (Black)		CST1,CST2,CST3,CST4
20-042-06-00008	CAM SWITCH KNOB (Red)		CST1,CST2,CST3,CST4
20-042-06-00009	FRONT PLATE CAM SWITCH (Yellow)		CST1,CST2,CST3,CST4
20-042-06-00010	Yellow BLANK PAPER FOR MARKING PLATE		CST1,CST2,CST3,CST4
20-042-06-00011	Yellow BLANK PAPER FOR NAME PLATE		CST1,CST2,CST3,CST4
20-042-06-00012	BLANK NAME PLATE		CST1,CST2,CST3,CST4
20-042-06-00013	BLANK MARKING PLATE		CST1,CST2,CST3,CST4
20-042-06-00016	SCREWS AND NUTS		CST1,CST2,CST3,CST4