



Technical Data Sheet



# *Omega Split Core Current Transformer Series*





*Omega 10A Series* is a range of split core current transformers that offers a cost effective and efficient method by which the current can be measured without the need to break the conductor, thereby reducing installation and commissioning time.

# Omega Split Core Current Transformer Series

## Omega 10A 93/30 SC (40)

Omega 10A

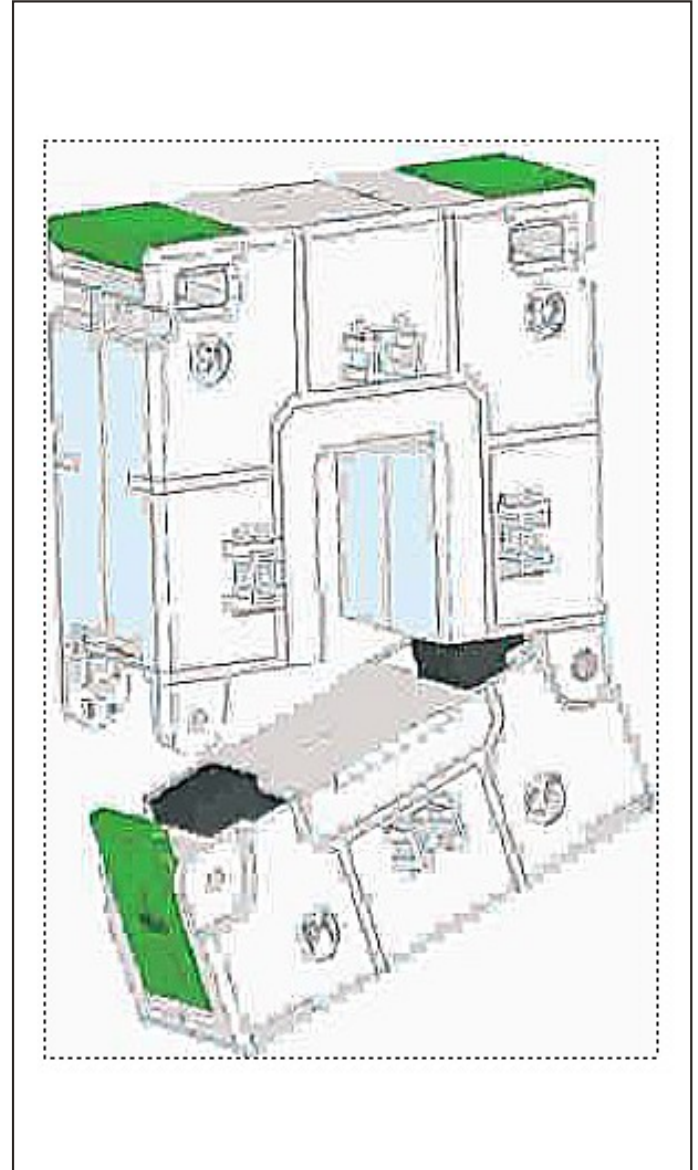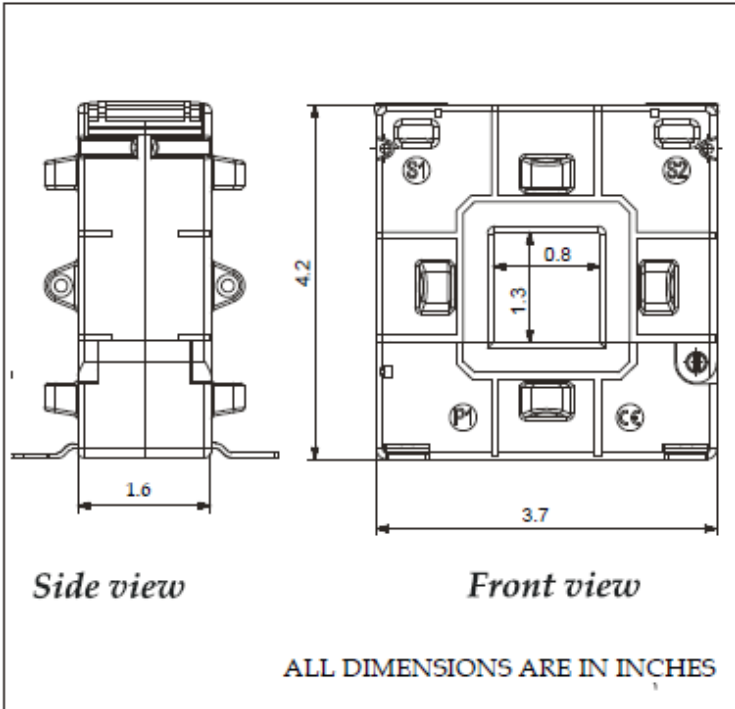

Primary Current	VA			OD/ID (Axial)
	Class 0.5	Class 1	Class 3	
100	-	1.5VA	3.5VA	3.7/1.2 (1.6)
150	-	1.75VA	3.75VA	3.7/1.2 (1.6)
200	-	2.5VA	5VA	3.7/1.2 (1.6)
250	-	3.75VA	6.25VA	3.7/1.2 (1.6)
300	2.5VA	5VA	6.25VA	3.7/1.2 (1.6)
400	3.75VA	6.25VA	10VA	3.7/1.2 (1.6)

# Omega Split Core Current Transformer Series

## Specifications

- System voltage 720V (0.72kV) maximum
- Test voltage 3kV for 1 minute
- System frequency 50 or 60 Hz
- Insulation class E
- Overload withstand 1.2 times rated current continuously
- Short circuit thermal 100 x rated primary for 1 second
- Operating temperature 20°C to 70°C
- Relative humidity 0-90% (non condensing)
- Compliant with IEC 60044-1. Bs7626
- Accuracy Class 3, 1 & 0.5
- Rated dynamic current = 2.55 x I<sub>ht</sub>
- Enclosure flame retardant grade classified UL 94V-O

## Applications

- Switchgear
- Distribution system
- Generator sets
- Control panels
- Overload protection
- Control devices



**sifam tinsley**  
PRECISION INSTRUMENTATION

**Sifam Tinsley Instrumentation Inc.**  
3105, Creekside Village Drive,  
Suite No. 801, Kennesaw,  
Georgia 30144 (USA)  
**E-mail Id :** [psk@sifamtinsley.com](mailto:psk@sifamtinsley.com)  
**Web :** [www.sifamtinsley.com](http://www.sifamtinsley.com)  
**Contact No. :** +1 404 736 4903

**Sifam Tinsley Instrumentation Ltd**  
Unit 1 Warner Drive,  
Springwood Industrial Estate  
Braintree, Essex, UK, CM72YW  
**E-mail:** [sales@sifamtinsley.com](mailto:sales@sifamtinsley.com)  
**Web:** [www.sifamtinsley.com/uk](http://www.sifamtinsley.com/uk)  
**Contact:** +44(0)1803615139