



Technical Data Sheet



Omega Split Core Current Transformer Series





Omega 10C Series is a range of split core current transformers that offers a cost effective and efficient method by which the current can be measured without the need to break the conductor, thereby reducing installation and commissioning time.

Omega Split Core Current Transformer Series

Omega 10C 155/80 SC (40)

Omega 10C

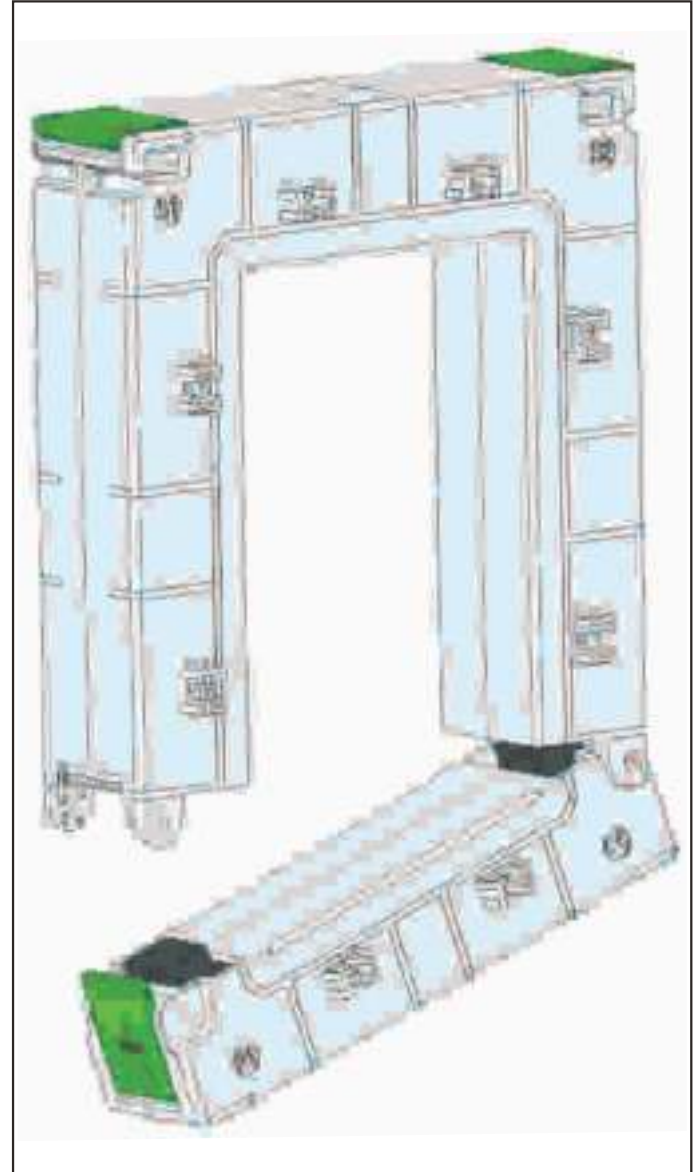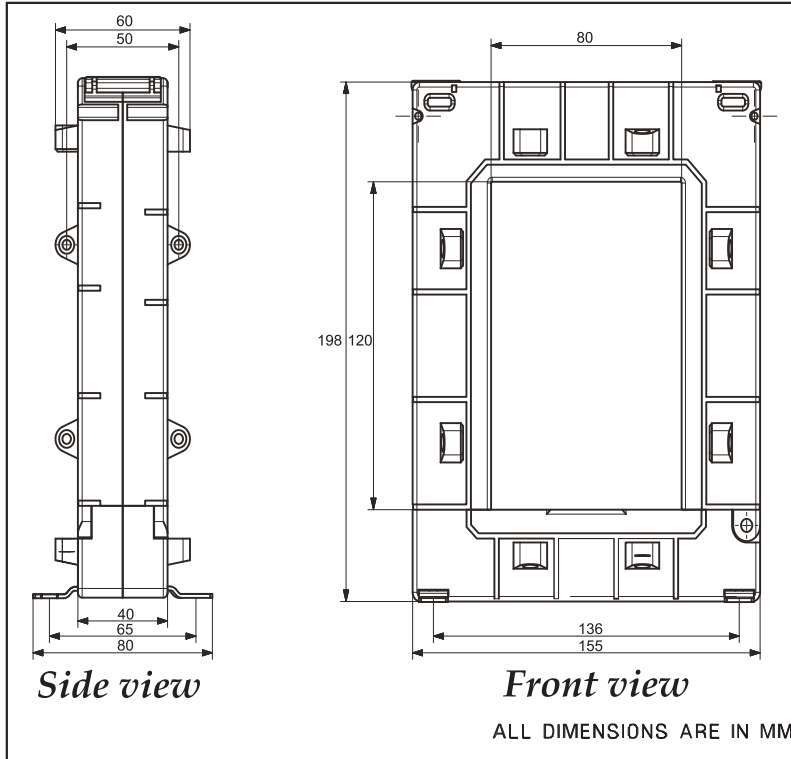

Primary Current	VA		OD/ID (Axial)
	Class 0.5	Class 1	
250	1VA	2.5VA	155 / 80 (40)
300	2.5VA	3.75VA	155 / 80 (40)
400	2.5VA	3.75VA	155 / 80 (40)
500	3.75VA	5VA	155 / 80 (40)
600	5VA	7.5VA	155 / 80 (40)
750	7.5VA	10VA	155 / 80 (40)
800	7.5VA	10VA	155 / 80 (40)
1000	10VA	15VA	155 / 80 (40)
1200	15VA	30VA	155 / 80 (40)
1250	15VA	30VA	155 / 80 (40)
1500	20VA	45VA	155 / 80 (40)
1600	20VA	45VA	155 / 80 (40)
2000	20VA	45VA	155 / 80 (40)
2500	25VA	45VA	155 / 80 (40)
3000	30VA	45VA	155 / 80 (40)

Omega Split Core Current Transformer Series

Specifications

- System voltage 720V (0.72kV) maximum
- Test voltage 3kV for 1 minute
- System frequency 50 or 60 Hz
- Insulation class E
- Overload withstand 1.2 times rated current continuously
- Short circuit thermal 100 x rated primary for 1 second
- Operating temperature 20°C to 70°C
- Relative humidity 0-90% (non condensing)
- Compliant with IEC 60044-1. Bs7626
- Accuracy Class 3, 1 & 0.5
- Rated dynamic current = 2.55 x I_{ht}
- Enclosure flame retardant grade classified UL 94V-O

Applications

- Switchgear
- Distribution system
- Generator sets
- Control panels
- Overload protection
- Control devices



sifam tinsley
PRECISION INSTRUMENTATION

Sifam Tinsley Instrumentation Inc.
3105, Creekside Village Drive,
Suite No. 801, Kennesaw,
Georgia 30144 (USA)
E-mail Id : psk@sifamtinsley.com
Web : www.sifamtinsley.com
Contact No. : +1 404 736 4903

Sifam Tinsley Instrumentation Ltd
Unit 1 Warner Drive,
Springwood Industrial Estate
Braintree, Essex, UK, CM72YW
E-mail: sales@sifamtinsley.com
Web: www.sifamtinsley.com/uk
Contact: +44(0)1803615139